

General Description

The OCH184 is an integrated Hall effect latched sensor designed for electronic commutation of brush-less DC motor applications. The device using High Voltage process includes an on-chip Hall voltage generator for magnetic sensing, a comparator that amplifies the Hall voltage, and a Schmitt trigger to provide switching hysteresis for noise rejection, and an open-collector output. An internal band-gap regulator is used to provide temperature compensated supply voltage for internal circuits and allows a wide operating supply range.


Features

- Wide operating voltage range: 2.7V~40V
- Operating temperature range: -40°C ~ +150°C
- Temperature compensation
- Reverse polarity protection
- Open-Drain pre-driver
- Package: SIP-3L、SOT23-3L

Applications

- Rotor Position Sensing
- Brush-less DC Motor
- Speed measurement
- Revolution counting

Pin Configuration

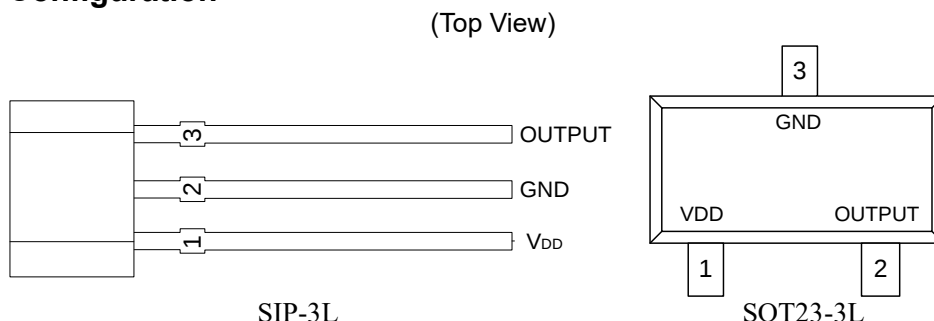

Name	No.		Status	Description
	SIP-3L	SOT23-3L		
VDD	1	1	P	IC Power Supply
GND	2	3	P	IC Ground
OUTPUT	3	2	O	OCH184(SIP-3L)
				OCH184S(SOT23-3L)
				OCH184N(SOT23-3L)
				It is low state during the S magnetic field
				It is low state during the N magnetic field

Application Circuit

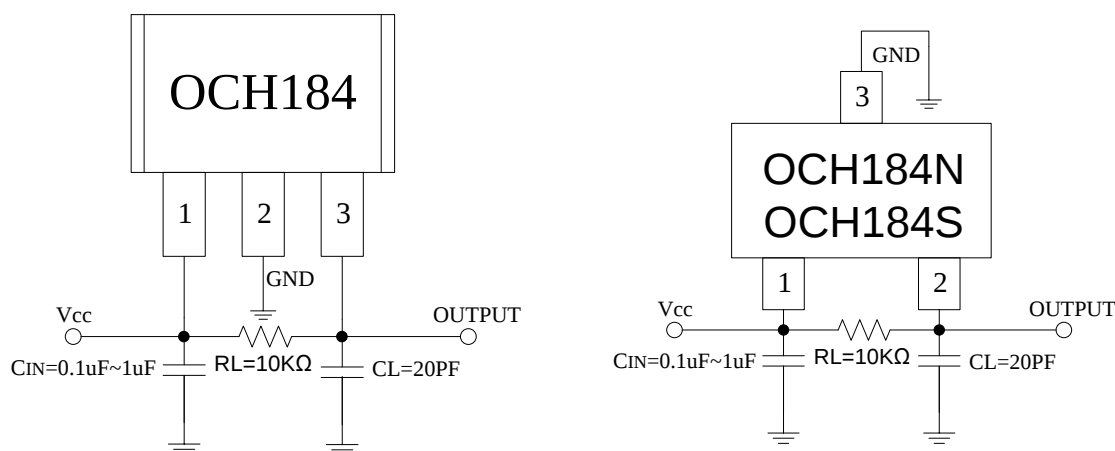


Figure 1, application circuit

Note: C_{IN} is for power stabilization and to strengthen the noise immunity, the recommended capacitance is 0.1~1uF. If the V_{CC} power supply is clean, the C_{IN} can be cancelled.



■ Ordering Information

Part Number	Package Type	Packing Qty	B _{OP} (Gauss)	B _{RP} (Gauss)	Temperature	Eco Plan	Lead
OCH184ME	SIP-3L	1000pcs	23(Typ.)	-23(Typ.)	-40 ~ 150°C	ROHS	Cu
OCH184NWAE	SOT23-3L	3000pcs	-23(Typ.)	23(Typ.)	-40 ~ 150°C	ROHS	Cu
OCH184SWAE	SOT23-3L	3000pcs	23(Typ.)	-23(Typ.)	-40 ~ 150°C	ROHS	Cu

■ Block Diagram

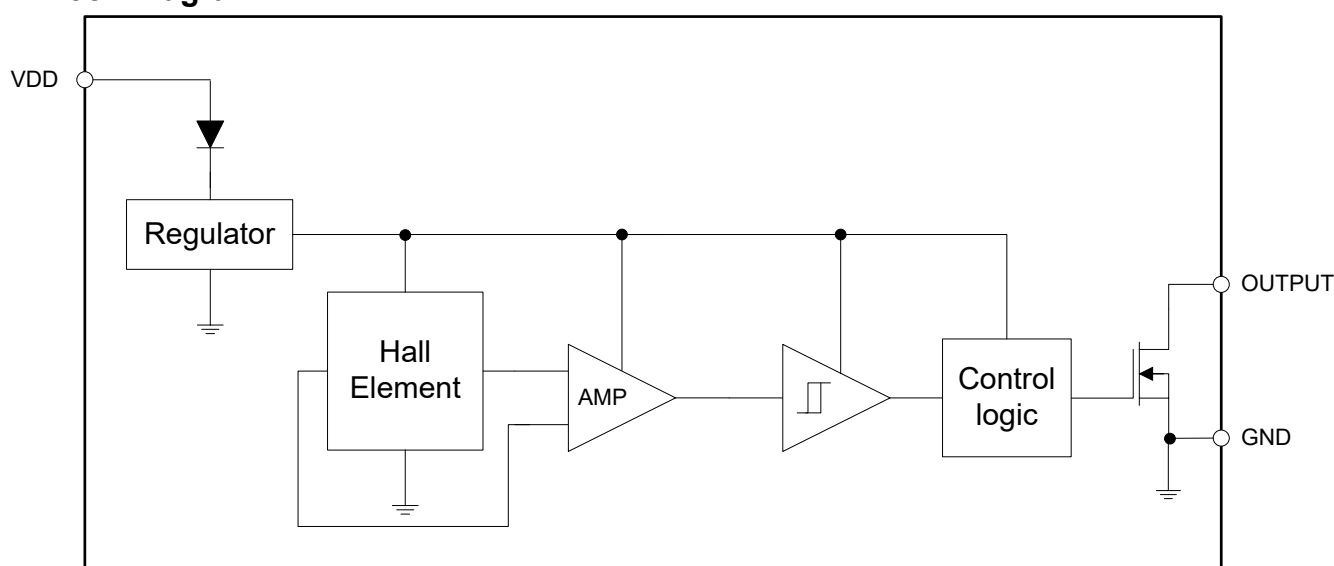


Figure 2, Block Diagram of OCH184

■ Absolute Maximum Ratings

Supply Voltage		65V
Output OFF Voltage, V _{DS}		65V
Output Maximum Sink Current (AVG)		25mA
Power Dissipation (SIP-3L)	T _a =25°C	400mW
Power Dissipation (SOT23-3L)	T _a =25°C	260mW
Thermal Resistance (SIP-3L)	T _{ja}	0.34°C/mW
	T _{jc}	0.42°C/mW
Thermal Resistance (SOT23-3L)	T _{ja}	0.52°C/mW
	T _{jc}	0.64°C/mW
Operating Temperature Range		-40°C ~ +150°C
Storage Temperature Range		-65°C ~ +150°C
Junction Temperature		+150°C
Lead Temperature(Soldering, 10 sec)		+260°C



■ DC Electrical Characteristics(at Ta=25°C)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Operating Voltage	V _{DD}		2.7	-	40	V
Supply current	I _{DD}	No use pin is open V _{CC} :2.7V~40V, OUT “H”	-	2.42	5	mA
Switching Frequency	F _{SW}	V _{CC} =5V	-	10	-	KHz
Output Saturation Voltage	V _{SAT}	V _{CC} =5V, OUT “L” , I _{SINK} =25mA	-	-	0.5	V

■ Magnetic Characteristics

■ OCH184、 OCH184S, Ta=25°C					
Parameter	Symbol	Min.	Typ.	Max.	Unit
Operate point	B _{OP}	+5	23	45	Gauss
Release Point	Brp	-45	-23	-5	Gauss
Hysteresis	B _{hys}	30	46	70	Gauss

OCH184N, Ta=25°C					
Parameter	Symbol	Min.	Typ.	Max.	Unit
Operate point	B _{OP}	-45	-23	-5	Gauss
Release Point	Brp	+5	23	45	Gauss
Hysteresis	B _{hys}	30	46	70	Gauss

■ Output VS Magnetic Pole

Part No.	Magnetic Pole	Test Conditions	Output
OCH184	South Pole	B > BOP	Low
OCH184S			
OCH184	North Pole	B < BRP	High
OCH184S			
OCH184N	North Pole	B < BOP	Low
OCH184N	South Pole	B > BRP	High


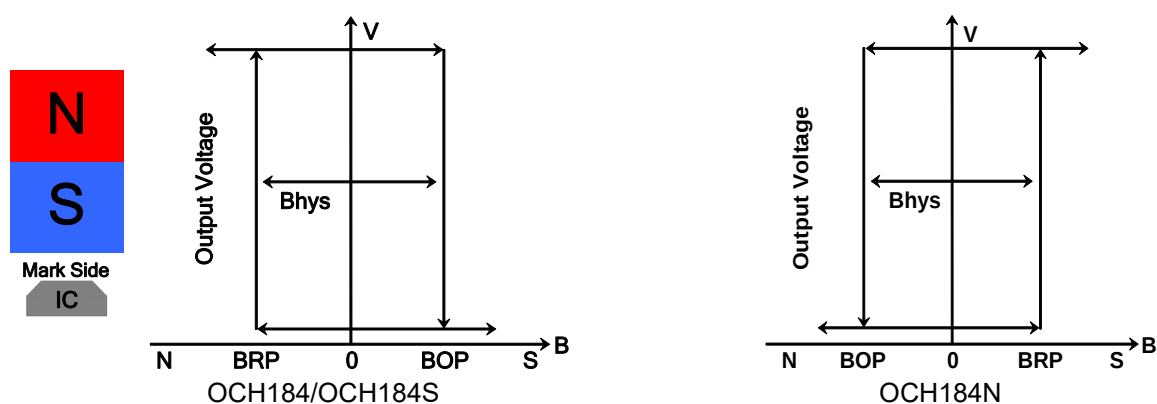


Figure 3, Magnetic Operational Characteristics Of OCH184




■ Hall Sensor Location


TOP View

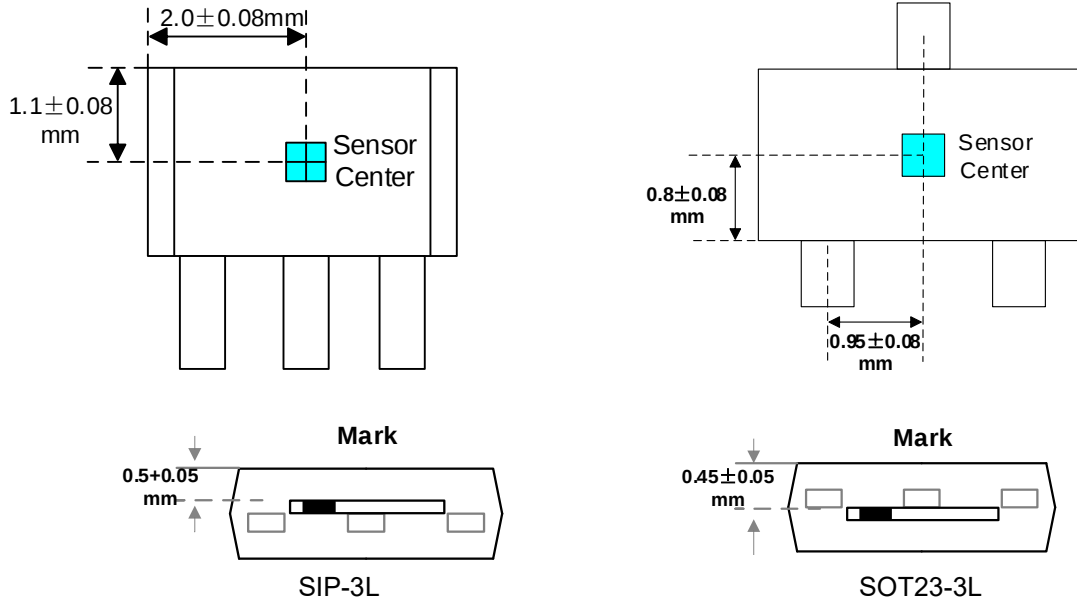

■ Land Pattern (for reference only)

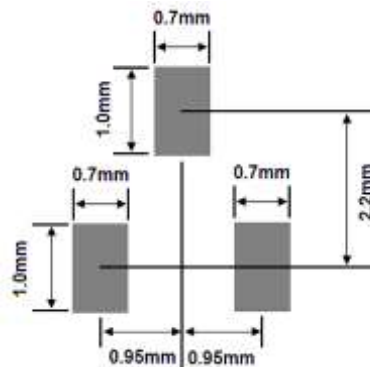


■ Marking Information

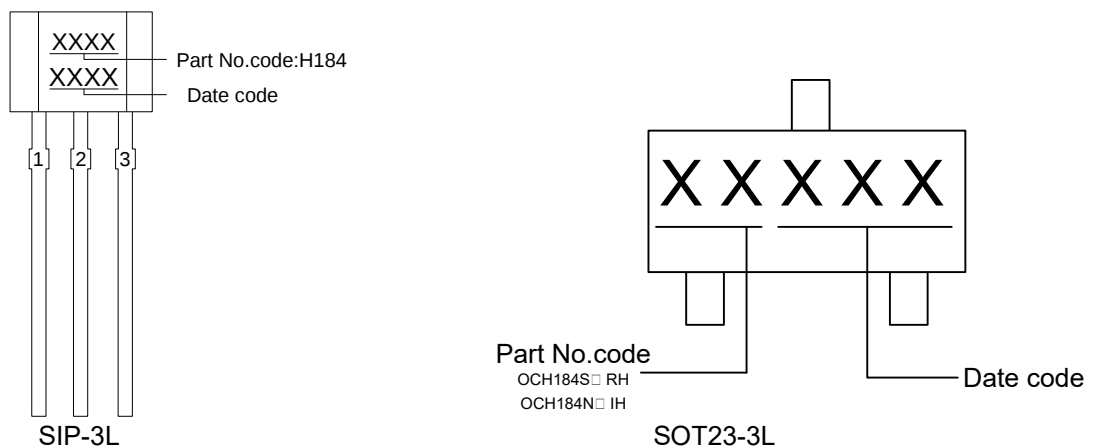

■ Package Information


1) SIP-3L

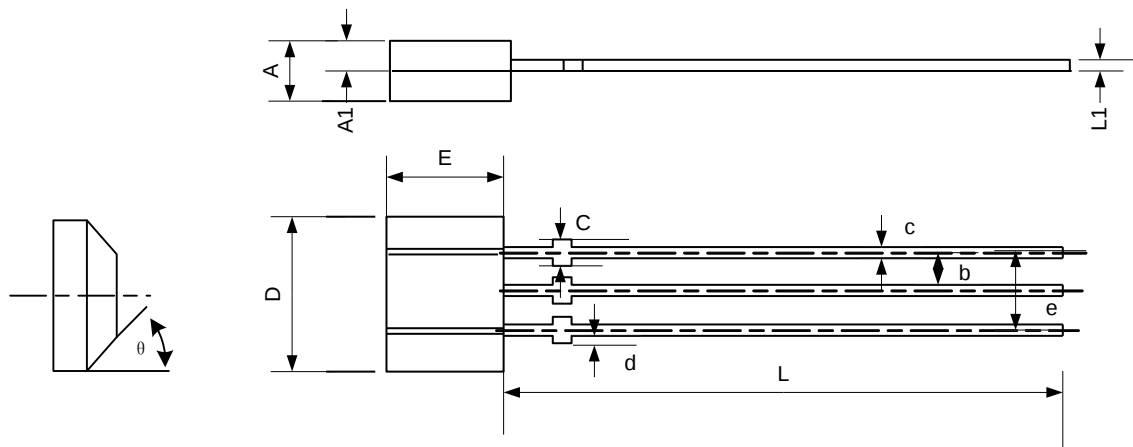

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.245	1.753	0.049	0.069
A1	0.750REF		0.030REF	
b	1.270REF		0.050REF	
C	0.406	0.550	0.016	0.022
c	0.330	0.495	0.013	0.019
D	4.05REF		0.159REF	
d		0.100		0.004
E	2.73	3.27	0.107	0.129
e	2.540REF		0.100REF	
L	13.60	15.60	0.535	0.614
L1	0.350	0.410	0.014	0.016
θ		45°		45°



2) SOT23-3L

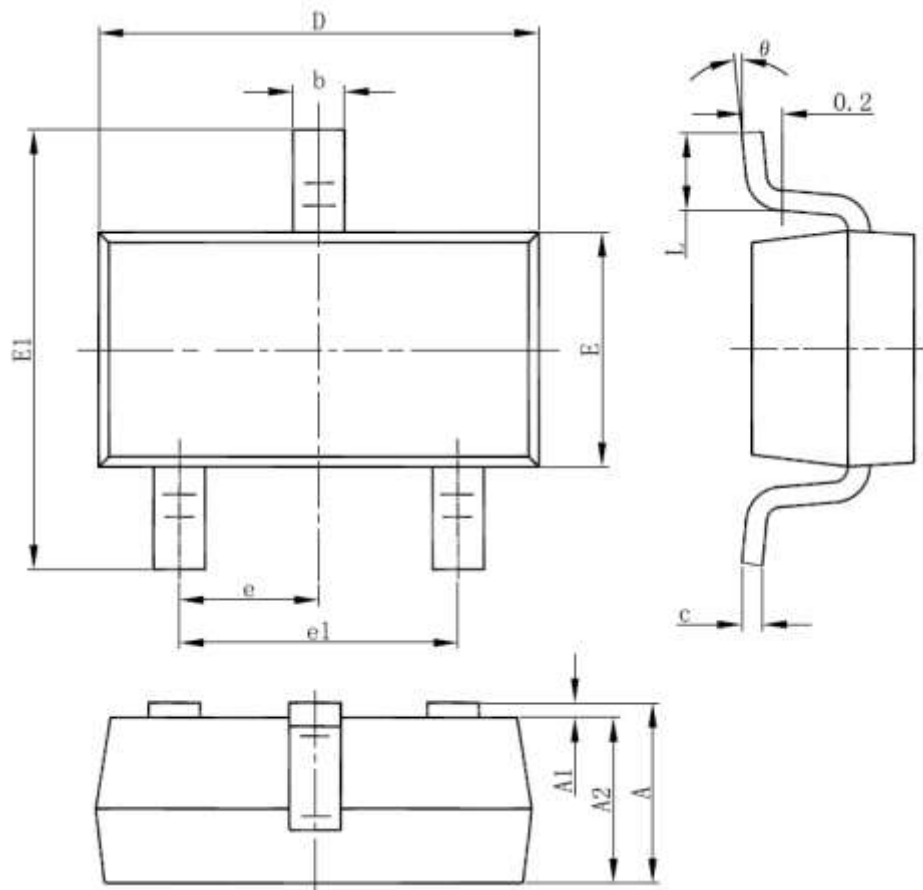

Symbol	Dimensions In Millimeters			Dimensions In Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.050	1.15	1.250	0.041	0.045	0.049
A1	0.000	0.050	0.100	0.000	0.002	0.004
A2	1.050	1.100	1.150	0.041	0.043	0.045
b	0.300	0.400	0.500	0.012	0.016	0.020
c	0.100	0.150	0.200	0.004	0.006	0.008
D	2.820	2.920	3.020	0.111	0.115	0.119
E	1.500	1.600	1.700	0.059	0.063	0.067
E1	2.650	2.800	2.950	0.104	0.110	0.116
e1	1.800	1.900	2.000	0.071	0.075	0.079
e	0.950 REF			0.037 REF		
L	0.300	0.450	0.600	0.012	0.018	0.024
θ	0°	4°	8°	0°	4°	8°




■ Packing Information

1) SIP-3L

1. Packing type: Box
2. Packing minimum: 1000pcs

2) SOT23-3L

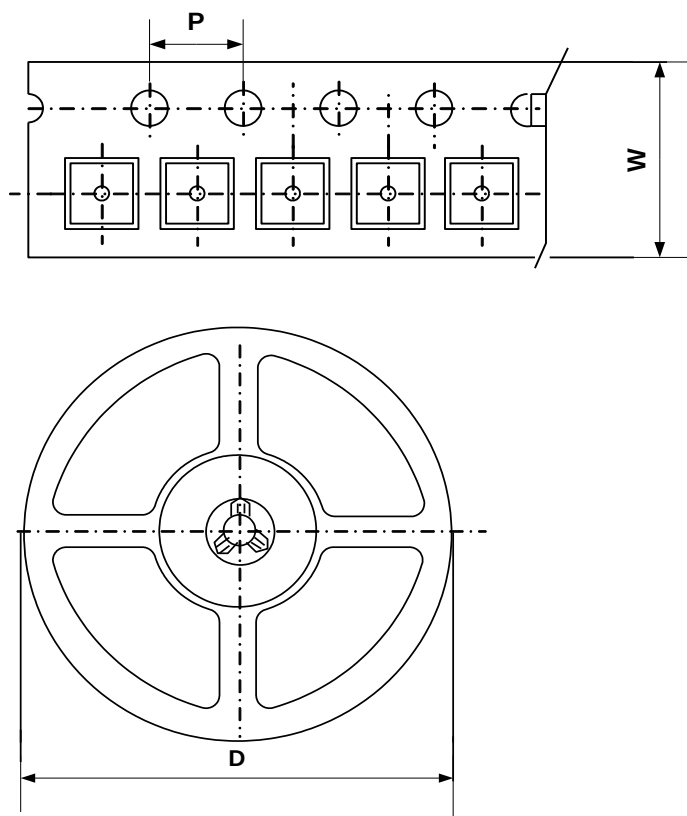

Package Type	Carrier Width (W)	Pitch (P)	Reel Size(D)	Packing Minimum
SOT23-3L	8.0±0.1 mm	4.0±0.1 mm	180±1 mm	3000pcs

Note: Carrier Tape Dimension, Reel Size and Packing Minimum



IMPORTANT NOTICE

Orient-Chip Semiconductor Co., Ltd (OCS) and its subsidiaries reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. These separate provision won't be provided.

